
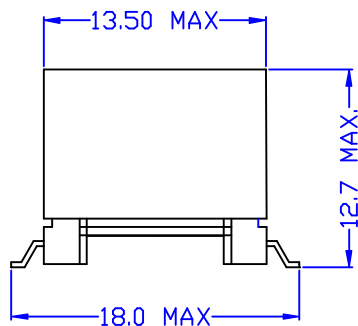


DOT PIN#1

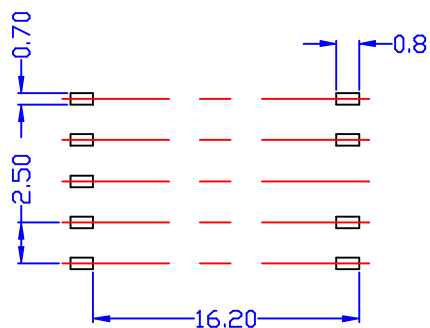

ELECTRICAL CHARACTERISTICS: (FOR EP13ST015 COMPATIBLE)

1. D.C.R. : PIN 10-8 = 0.55 OHM MAX.
PIN 2-4 = 1.0 OHM MAX.
PIN 1-3 = 1.0 OHM MAX.
PIN 9-7 = 0.7 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 10-7 (8-9 SHORT) = 2.6mH $\pm$ 10%
3. LEAKGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-7 (1-4, 3-2, 8-9 SHORT) = 5uH MAX.
4. TURNS RATIO (@50KHZ, 0.1Vrms) :
PIN 10-7 (8-9 SHORT) : PIN 1-4 (2-3 SHORT) = 1 $\pm$ 1%
5. HI-POT (@1875VAC, 0.5mA, 1SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-0004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-549	
	RELEASE	09/20/2001	PAIR	SUEDY	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/20/01			DRAW <i>Pair</i>
REVISIONS									

ADSL