
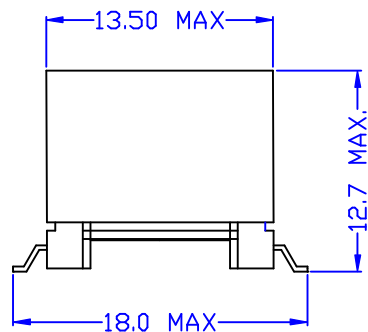
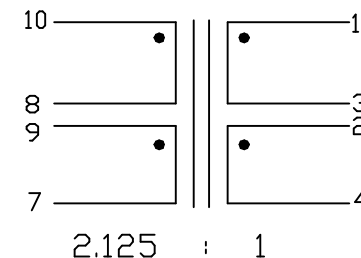
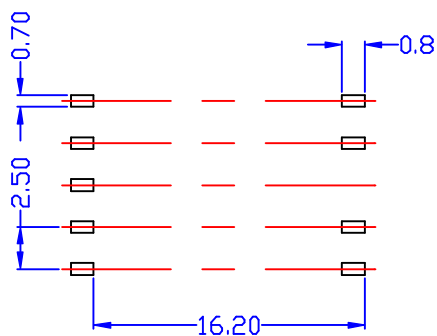


DOT PIN#1

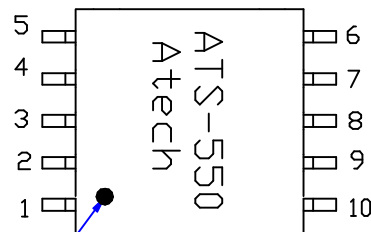

ELECTRICAL CHARACTERISTICS : <FOR EP13ST016 COMPATIBLE>

- D.C.R. : PIN 10-8 = 0.55 OHM MAX.
PIN 2-4 = 0.5 OHM MAX.
PIN 1-3 = 0.5 OHM MAX.
PIN 9-7 = 0.7 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 10-7 (8-9 SHORT) = 2.6mH $\pm$ 10%
- LEAKGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-7 (1-4, 3-2, 8-9 SHORT) = 7uH MAX.
- TURNS RATIO (@120KHZ, 0.1Vrms) :
PIN 10-7 (8-9 SHORT) : PIN 1-4 (2-3 SHORT) = 2.125 $\pm$ 1%
- HI-POT (@1875VAC, 0.5mA, 1SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-550	
	RELEASE	09/21/2001	PAIR	SUEDY	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						09/21/01			
								DRAW <i>Pair</i>	