
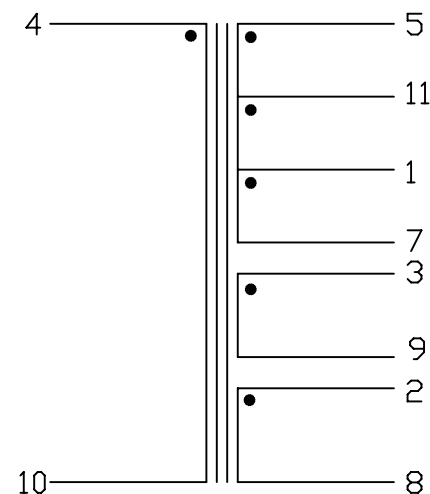
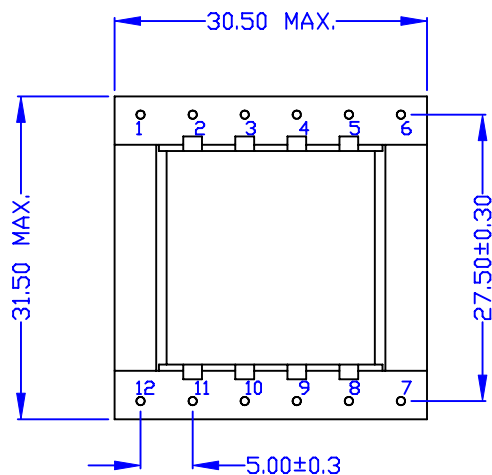


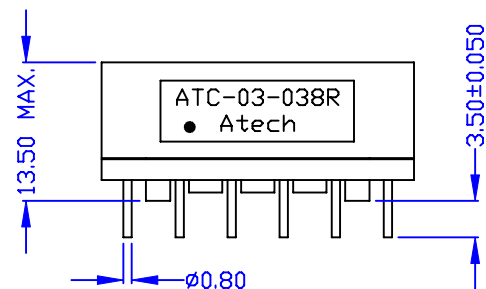

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 4-10 = 130 mΩHM ± 15%, PIN 5-7 = 110 mΩHM ± 15%
PIN 3-9 = 2-8 = 7 ΩHM ± 10%
2. INDUCTANCE (@10KHz , 1Vrms) : PIN 4-10 = 110uH ± 15%
PIN 5-7 = 49uH ± 15%
PIN 3-9 = 2-8 = 6mH ± 15%
3. HI-POT (@800VDC , 1 mA , 2SEC) :
PIN 2-3, 2-4, 2-5, 3-4, 3-5, 4-5, 10-CORE (2, 3, 4, 5 SHORT)
4. POLARITY (@10KHz , 1Vrms) : PIN 3-9 : 2-8, 3-9 : 5-7, 3-9 : 4-10
5. RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:022794-6667 FAX:022794-8004		DWG. NO.
A	SPC.	01/22/2007	PAIR	MICHAEL	EUGENE	UNITS:		ATC-03-038R
						M/M		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						01/08/07		Pair
						P/N:		CTW130000A