
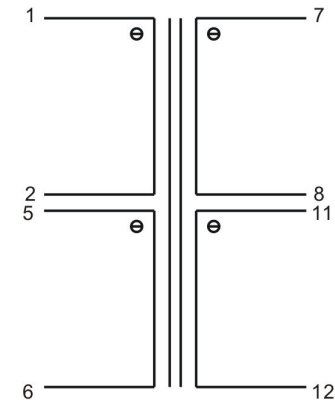
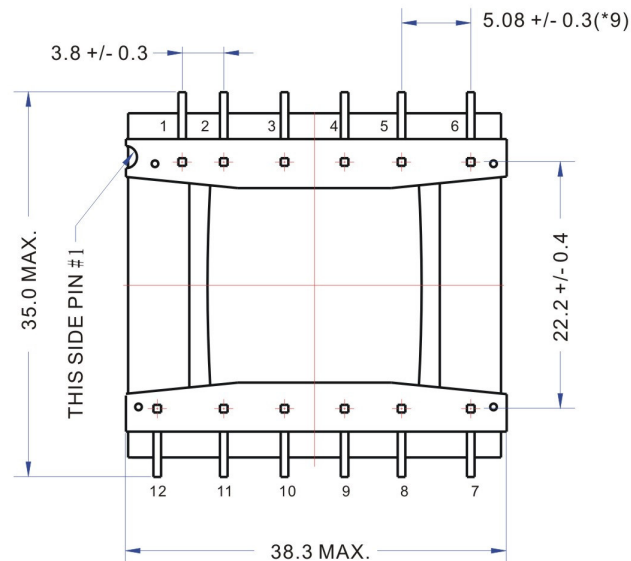


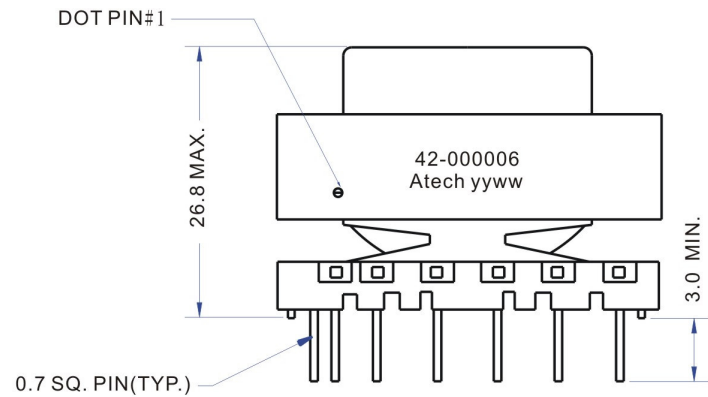

ELECTRICAL CHARACTERISTICS :

- 1.D.C.R. : PIN 1-2 = 730 OHM MAX.
PIN 5-6 = 850 OHM MAX.
PIN 7-8 = 7.6 OHM MAX.
PIN 11-12 = 8.2 OHM MAX.
- 2.EXCITING CURRENT(@PARALLEL AC 110V INPUT) :
PIN 1-2 & 5-6 = 20 mA MAX.
- 3.NO LOAD VOLTAGE :
PIN 7-8 = 8.4 V +/- 5%.
PIN 11-12 = 8.4 V +/- 5%.
- 4.FULL LOAD VOLTAGE(@100 mA) :
PIN 7-8 = 7.5 V +/- 5%.
PIN 11-12 = 7.5 V +/- 5%.
- 5.HI-POT (@1500 VAC , 1 mA , 1 MINUTE) :
PRI TO SEC.
PRI TO CORE.
(@300 VAC , 1 mA , 1 SEC) :
PIN 1-6
- 6.POLARITY.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE TRANSFORMER	
							DWG NO. 5001-0001	
	RELEASE	08/26 /2008	Isaac	Vincent	Eugene	UNITS M/M	SAFETY	SHEET 1 / 1
NO.	DESCRIPTION	DATE	BY	CHK	APP	DATE 20080826	P/N CTW235000A	DRAW Isaac
REVISIONS								