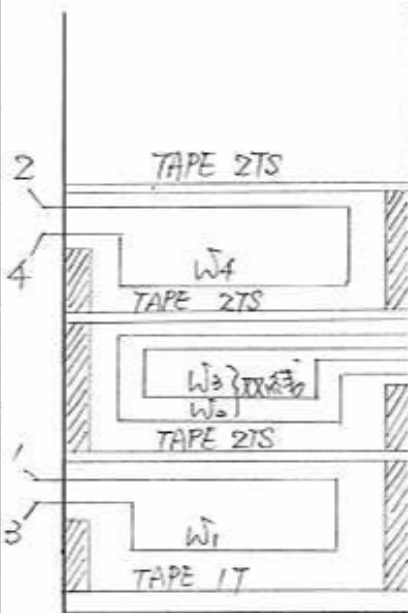
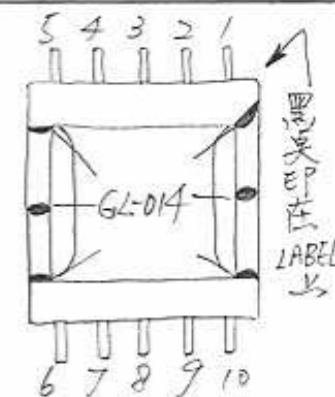


CUSTOMER		PART NUMBER		REV		CONSTRUCTION							SCHEMATIC DRAWING					
ASKEY		ATS-424C																
BOBBIN: EP-13, HSMD-25 (含塗)																		
CORE: EP-13, T-8.																		
AL=500μm±8%																		
GAP:				ORIGINAL														
TAPE: M#56, M#Super10																		
PPI#70/00																		
ASSEMBLY: CORE組合時, 鏡面要乾淨																		
有GAP在PIN#1端, 組合後, 外包																		
FRAME(CLIP): PPI#70/00, 8mm TAPE																		
ZTS, 並在線尾用紗針VAR-005固定。																		
PIN#1 INDICATOR:																		
黑點印在 LABEL 上																		
TAP WID Mm	TAP LYR	WID	STR	END	CW/CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL	REMARKS						
M#56 7.9mm	2	W1	1	3	反	0.15	2	50	M#Super10 1.4mm 2TS 在兩端 二層			1. 繞心時, BOBBIN PIN#1 朝外 2. 繞 W1, W2 時, BOBBIN 反轉, PIN#1 朝內 3. 繞 W4 時, BOBBIN 反轉, PIN#1 朝外 4. W2, W3 復同軸心繞 5. 繞心前, 先貼 M#56, 7.9mm TAPE 1T, 重疊後 > 2mm min 6. CREEPAGE 用 M#Super10, 1.4mm ± 0.1mm 7. 成品須與 GL-014 6 號螺絲固定						
雙結		W2	9	7	順	0.15	2	50	M#Super10 1.4mm 2TS 在兩端 四層									
M#56 7.9mm	2	W3	10	8	順	0.15	2	50										
M#56 7.9mm	2	W4	2	4	反	0.15	2	50	M#Super10 1.4mm 2TS 在兩端 二層									
		W5																
		W6																
		W7																
		W8																
PAGE / OF / REV.																		