

06-232

ATECH TECHNOLOGY CO., LTD.

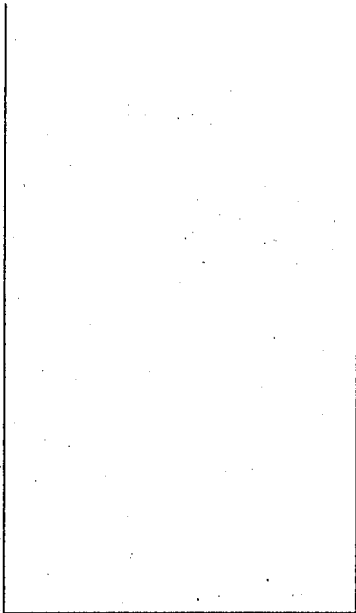
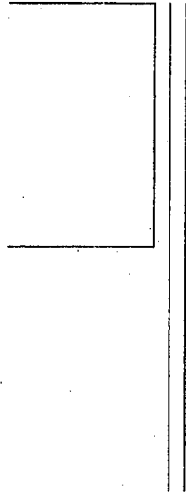
DESIGN SHEET

DS-001

CUSTOMER		PART NUMBER		REV	CONSTRUCTION								SCHEMATIC DRAWING							
和昌		CTA4/303VA																		
BOBBIN: 2334130C42																				
CORE: 203/308502																				
GAP:																				
TAPE: 3M#1350 3M#60PZK/0																				
ASSEMBLY: CORE 組合時有 GAP 的靠 PW 9 側, 鏡面須保持乾																				
FRAME(CLIP): 淨, 外包 3M#1350. 7.9mm, 2TS.													BOTTOM VIEW PIN LOCATION							
PIN#1 INDICATOR: DOT (印在 LABEL 上)																				
TAP WID Mm	TAP LYR	WID	STR	END	CW/CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL	REMARKS								
79	2	W1	1	3	順	0.06	2	42	Super 10	1.6mm		1. 繞 W1, W2, W3, W4, W7, W8, W9, W10 時. BOBBIN PW1 朝外.								
79	2	W2	2	4	順	0.06	2	42	2TS	1.6mm										
79	2	W3	5	7	順	0.08	2	10	Super 10	1.6mm		2. 繞 W5, W6 時. BOBBIN PW1 朝內.								
79	2	W4	6	8	順	0.08	2	10	1T	1.6mm										
79	2	W5	9	14	順	0.08	2	42	Super 10	1.6mm		3. 繞 W4, W8 時. 須走外線.								
79	2	W6	11	16	順	0.08	2	42	2TS	1.6mm										
79	2	W7	5	7	順	0.08	2	10	Super 10	1.6mm		PAGE 2 OF 1 Design Engineer: <i>8 nicent</i>								
79	2	W8	6	8	順	0.08	2	10	1T	1.6mm				REV.						

Remarks: 4. 成品須與 4 具惠利 AB 劑.

5. ROLLS 製程.

CUSTOMER	PART NUMBER	REV	CONSTRUCTION												SCHEMATIC DRAWING	
																
BOBBIN:																
CORE:																
GAP:																
TAPE:																
ASSEMBLY:																
FRAME(CLIP):																
PIN#1 INDICATOR:															BOTTOM VIEW PIN LOCATION	
TAP WID Mm	TAP LYR	WID	STR	END	CW/ CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL	REMARKS				
		W9	1	→	順	0.06	2	42	Super 10	1.6mm	密					
双 线		W10	2	✓	順	0.06	2	42	2Ts	在 2Ts 均	同					
7.9	2	W3														
		W4														
		W5														
		W6														
		W7														
		W8														
												PAGE 2 OF 2		REV.		
												Design Engineer:				