
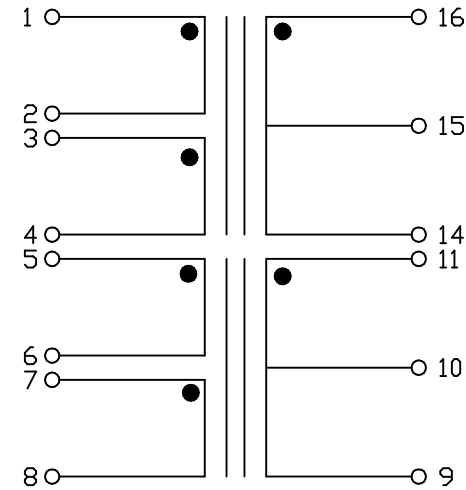

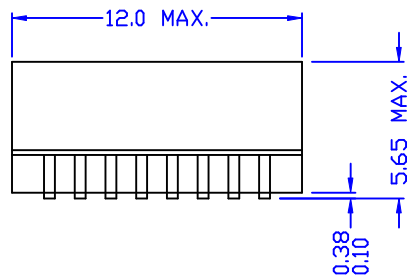


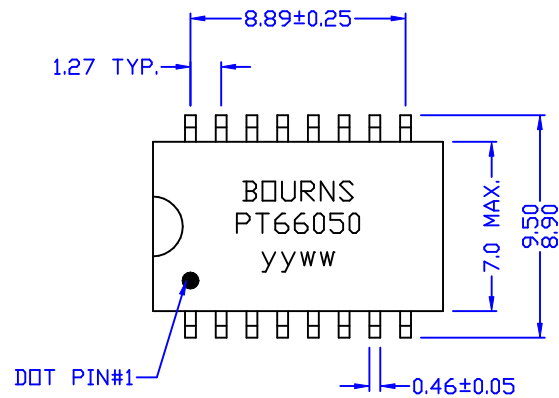

ELECTRICAL CHARACTERISTICS : <TX1099 COMPATIBLE>

1. TURNS RATIO : 16-14 : 1-2 : 3-4 = 1CT : 1 : 0.8 ±5%
11-9 : 5-6 : 7-8 = 1CT : 1 : 0.8 ±5%
2. OCL <10KHZ/0.01Vrms> : 1.2mH MIN.
3. LL <100KHZ/0.2Vrms> : 16-14<SHORT1,2,3,4> = 0.8uH MAX.
11-9<SHORT5,6,7,8> = 0.8uH MAX.
4. HI-POT : 1500Vrms
5. CWW <100KHZ/0.2Vrms> : 30pF MAX.
6. D.C.R. : 1.0 OHM MAX.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE T1/CEPT/ISDN TRANSFORMER	
								DWG. NO. PT66050	
	RELEASE	11/03/2004	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 of 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/03/04			
REVISIONS								DRAW <i>Pair</i>	