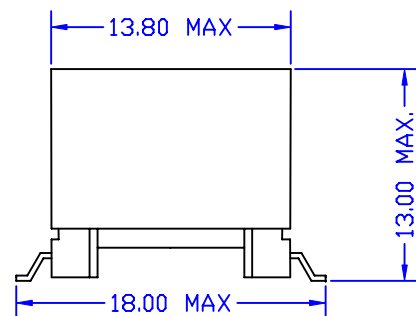
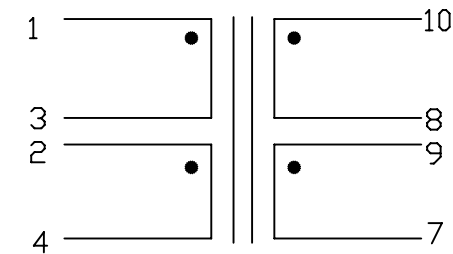
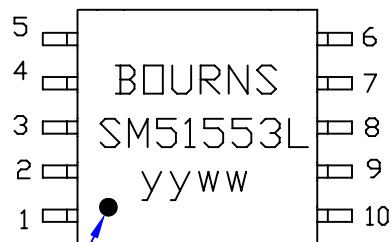


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 80 mΩHM MAX.
PIN 2-4 = 80 mΩHM MAX.
PIN 7-9 = 488 mΩHM MAX.
PIN 8-10 = 488 mΩHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 7-10 (8-9 SHORT) = 440μH±5%.
PIN 7-10 W/H 0.7ADC (8-9 SHORT) = 400μH MIN.
- TURN RATIO (@10KHZ, 1Vrms, 2-3, 8-9 SHORT) :
PIN 10-7:1-4 = 4±3%.
- HI-POT (@1875VAC, 1mA, 1S) : PRI-SEC.
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE TRANSFORMER	
								DWG. NO. SM51553EL	
	RELEASE	11/20/2006	PAIR	MICHAEL	EUGENE	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						11/20/06			