







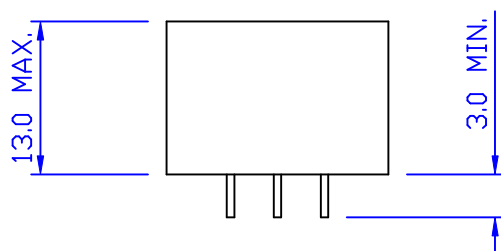

DATA CODE

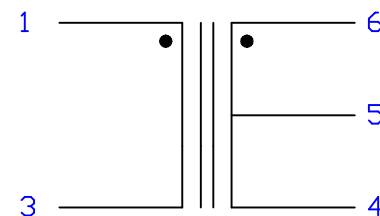

0.5 SQ. PIN (REF.)

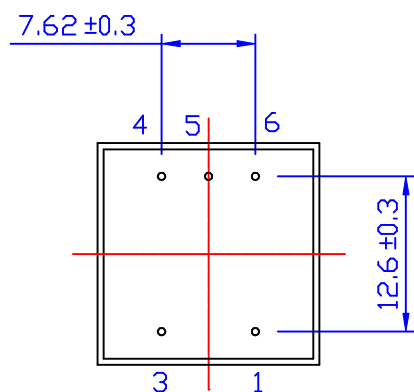

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 108.9 Ω HM $\pm 15\%$.
PIN 6-5 = 64.4 Ω HM $\pm 15\%$.
PIN 5-4 = 69.6 Ω HM $\pm 15\%$.
- INDUCTANCE (@100HZ, 0.27Vrms) :
PIN 1-3 = 7.14 H MIN.
PIN 6-5 = 1.79 H MIN.
PIN 5-4 = 1.79 H MIN.
PIN 6-4 = 7.14 H MIN.
- TURN RATIO (@100HZ, 0.27Vrms) :
PIN 1-3:6-4 = 1 $\pm 1\%$.
PIN 1-3:6-5 = 2 $\pm 1\%$.
- HI-POT (@2KVAC, 0.5mA, 2S) : PRI-SEC.
- LEAD FREE

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:0022794-6667 FAX:0022794-8004		DWG. NO.
								Z1604N
RELEASE		03/21/2005	PAIR	SUEDY	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	03/21/05	DRAW Pair