
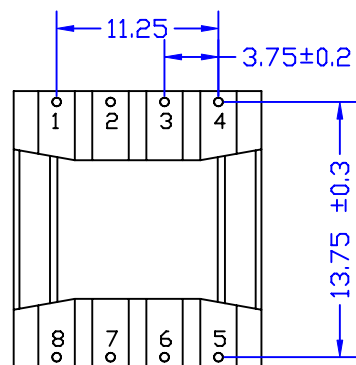
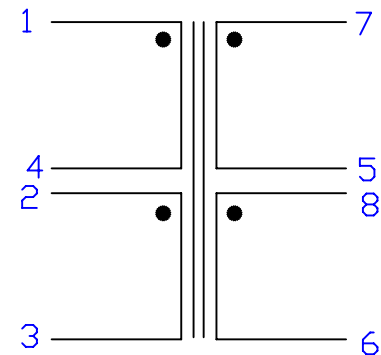
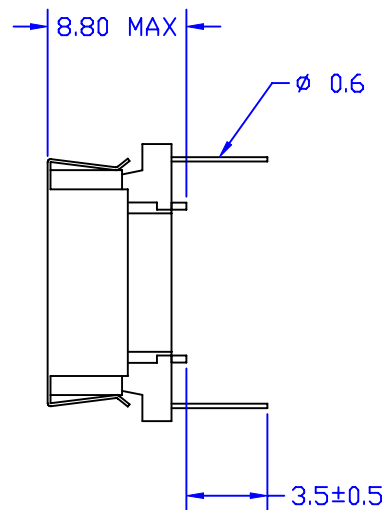


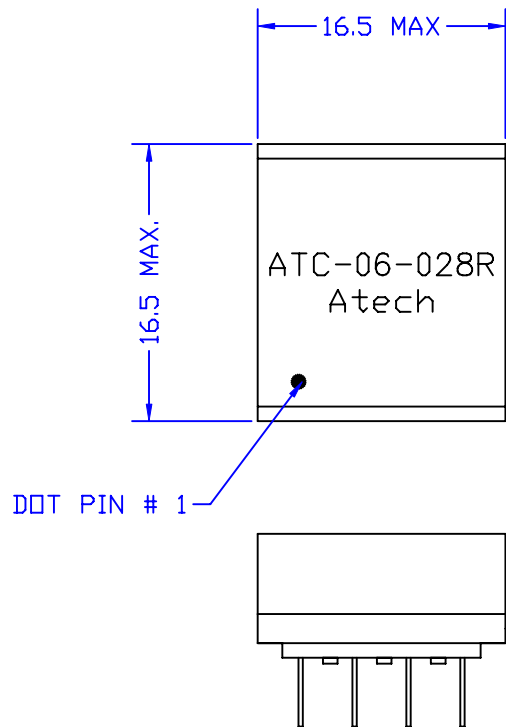

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 199 mOHM MAX., PIN 2-3 = 96 mOHM MAX.
PIN 7-5 = 16.8 mOHM MAX. PIN 8-6 = 16.8 mOHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms. ALC= OFF) : PIN 1-4 = 95uH +/-5%
1 ADC : 1-4 = 85uH MIN.
- TURN RATIO (@4KHz, 0.1Vrms) : PIN 1-4 : 2-3 = 5.66±2%
PIN 1-4 : 7-5 = 5.66±2% PIN 1-4 : 8-6 = 5.66±2%
- HI-POT (@500VAC, 1mA, 1SEC 6-7 SHORT) : 1-2 , 1-8
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-06-028R	
	RELEASE	08/18/2006	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						08/18/06	DRAW <i>Pair</i>		