
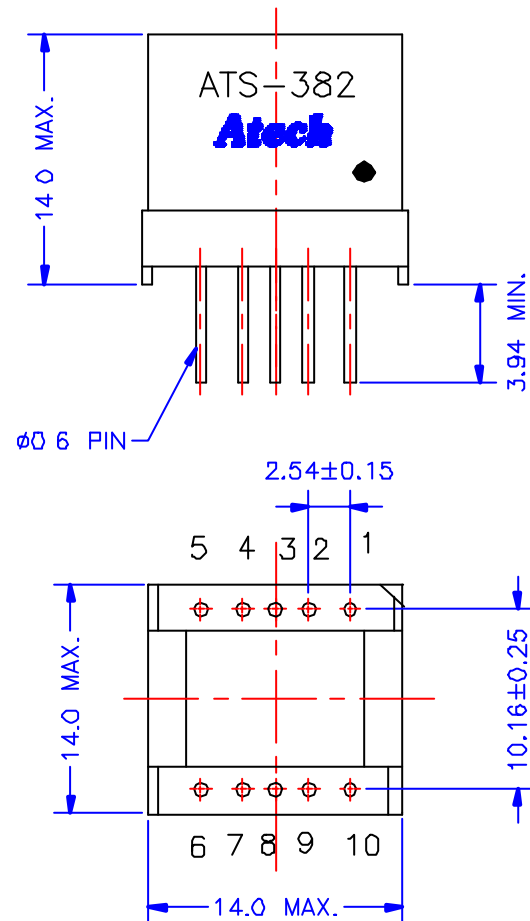


100 SPLIT : 69.4 CT

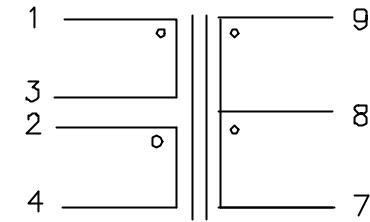

ELECTRICAL CHARACTERISTICE:

1. D.C.R. 1-3 = 2-4 = 1.91 OHM $\pm 10\%$ 9-7 = 4 OHM $\pm 10\%$
2. INDUCTANCE (@10KHZ, 0.1Vrms, 2-3 SHORT,)
1-4 = 3.96mH $\pm 5\%$
3. LEACKAGE INDUCTANCE (@100KHZ, 0.1Vrms, 2-3 & 7-9 SHORT)
1-4 = 15uH MAX.
4. Cw(@10KHZ, 1Vrms, 2-3 SHORT) 1-9 = 40pF MAX.
5. TURNS RATIO (@12KHZ, 1Vrms)
1-4(2-3 SHORT) : 9-7 = 1.2 $\pm 1.5\%$
3-1 : 4-2 = 1 $\pm 1\%$
6. HI-POT (@1500VAC, 1mA, 2SEC) 1-9, 2-9

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								ATS-382
RELEASE		05/21/99	PAIR		SLIEDY	UNITS	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						05/21/99	Pair	